

09-25-00

A

09/22/00

J06920 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
2204/A42Total Pages in this Submission
75**TO THE COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for a
invention entitled:**SYSTEM, DEVICE, AND METHOD FOR BRIDGING NETWORK TRAFFIC**

and invented by:

YUNZHOU LIIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Enclosed are:

Application Elements

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 41 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

J06920 U.S. PTO
09/22/00

09/22/00

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
2204/A42

Total Pages in this Submission
75

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 27
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL543499318US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
2204/A42

Total Pages in this Submission
75

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	57	- 20 =	37	x \$18.00	\$666.00
Indep. Claims	9	- 3 =	6	x \$78.00	\$468.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,824.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☐ Credit any overpayment.
- ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Jeffrey T. Klayman
Registration No. 39,250
BROMBERG & SUNSTEIN LLP
125 Summer Street
Boston, MA 02110-1618

Dated: September 22, 2000



2101

PATENT TRADEMARK OFFICE

CC:

Tel: 617-443-9292

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): YUNZHOU LI

Docket No.

2204/A42

Serial No.

NOT YET ASSIGNED

Filing Date

HEREWITH

Examiner

NOT YET ASSIGNED


Group Art Unit

NOT YET ASSIGNED

Invention: SYSTEM, DEVICE, AND METHOD FOR BRIDGING NETWORK TRAFFIC

I hereby certify that this New utility patent application and related papers thereto*(Identify type of correspondence)*

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Commissioner of Patents, Washington, D.C.

20231-0001 on September 22, 2000*(Date)*Jeffrey T. Klayman*(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)*EL543499318US*("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR UNITED STATES PATENT

FOR

SYSTEM, DEVICE, AND METHOD FOR BRIDGING NETWORK TRAFFIC

Inventors:

Yunzhou Li

351 Pawtucket Boulevard Unit 7
Lowell, MA 01854

Attorney Docket No.: 2204/A42

Client Reference No.: BA0491

Attorneys:

BROMBERG & SUNSTEIN LLP
125 Summer Street
Boston, MA 02110
(617) 443-9292

SYSTEM, DEVICE, AND METHOD FOR BRIDGING NETWORK TRAFFIC

CROSS-REFERENCE TO RELATED APPLICATIONS

The present patent application may be related to the following commonly owned United States patent applications, which are hereby incorporated herein by reference in their entireties:

United States Patent Application No. 09/648,273 entitled A MECHANISM FOR AUTOMATIC PROTECTION SWITCHING IN A ROUTER, which was filed on August 25, 2000 in the names of Dan Adamski, David Benson, Bilel Jamoussi, Yunzhou Li, and Jagannath Shantigram (Attorney Docket No. 2204/A17); and

United States Patent Application No. XX/XXX,XXX entitled APPARATUS AND METHOD FOR SUPPORTING MULTIPLE REDUNDANCY MECHANISMS, which was filed on even date herewith in the name of Yunzhou Li (Attorney Docket No. 2204/A41).

FIELD OF THE INVENTION

The present invention relates generally to communication systems, and more particularly to bridging network traffic in a communication system.

BACKGROUND OF THE INVENTION

In today's information age, computers and computer peripherals are frequently interconnected over a communication network. A typical communication network includes a number of networking devices, such as switches and routers. These networking devices work together to route packets of information from a source device to one or more destination devices.

A typical networking device includes a number of line cards. Each line card occupies a "slot" of the networking device, and supports one or more network interfaces

-2-

(each referred to hereinafter as a "slot port") through which the networking device communicates with various other devices, including other networking devices. Exemplary slot port types include Ethernet and SONET.

Within the networking device, the line cards are interconnected by a switching fabric. Each line card includes one or more fabric interfaces (each referred to hereinafter as a "fabric port"). Among other things, the fabric ports on a particular line card may be used for supporting different types of fabric services (e.g., unicast versus multicast fabric ports) and/or for supporting priority queues (e.g., high priority versus low priority fabric ports). The switching fabric routes information between the line cards, and more particularly between fabric ports.

Each line card includes logic for receiving, processing, and transmitting packets. Each line card can receive and transmit packets over its fabric port(s) and over its slot port(s). Each line card maintains a routing table that is typically distributed to all line cards by a central controller. The routing table includes a number of routing table entries, where each routing table entry indicates, among other things, the outgoing interface(s) associated with a particular destination. An outgoing interface can be a slot port on the same line card as indicated by a slot port number, a different line card as indicated by a slot number, or a specific fabric port on a different line card as indicated by a slot number/fabric port number pair.

The line cards interoperate over the switching fabric in order to route packets. Specifically, a packet received by a particular line card (referred to hereinafter as the "incoming line card") over a particular slot port may be forwarded to other slot ports on the same line card and/or to other line cards. The incoming line card uses its routing table to determine the outgoing interfaces for the packet, typically based upon a destination address or label in the packet, and forwards the packet over the outgoing interface(s).

In certain applications, two line cards are "bridged" so that all packets sent to a first line card (referred to hereinafter as a "working line card" or "WLC") over the switching fabric are also sent to a second line card (referred to hereinafter as the "protection line card" or "PLC"). Among other things, a bridge may be used for redundancy or protection switching. In a typical embodiment, bridging is accomplished by modifying the routing

-3-

table to include the PLC as an outgoing interface in all routing table entries having the WLC as an outgoing interface. For convenience, each such routing table entry is referred to hereinafter as a "bridged routing table entry." With a bridge in place, any packet that is sent to the WLC is also sent to the PLC.

5 When used for redundancy, both the WLC and the PLC typically have active connections to a common destination, and the bridge forwards packets to both the WLC and the PLC so that the packets are sent over both connections to the common destination. The destination receives the same packets over both connections, and therefore the destination can obtain packets from either connection. In this application, the bridge is considered to be a permanent bridge in that the bridge must be maintained at all times in order for redundancy to be maintained.

10 When used for protection switching, the PLC is typically a backup line card that is activated when communication over the WLC fails, either from a connection failure or a failure of the WLC itself. In this application, the bridge may be a permanent bridge or a temporary bridge. A permanent bridge is typically established before detecting the failure so that packets are already being sent to the PLC when the failure is detected. In this case, protection switching can be completed by simply activating the PLC upon detecting the failure. A temporary bridge is typically established dynamically after detecting the failure so that packets are not sent to the PLC until after the failure is detected. In this case, protection switching requires both establishment of the bridge and activation of the PLC.

15 A temporary bridge may be used for applications in which a permanent bridge is either undesirable or impractical. For example, a temporary bridge may be required when the PLC is used as a backup for multiple WLCs. In this application, when a failure is detected with one of the WLCs, a temporary bridge is established between that WLC and the PLC if there is no permanent bridge established between that WLC and the PLC.

20 Establishing a temporary bridge typically involves reworking the routing table in order to add the PLC as an outgoing interface in all routing table entries having the WLC as an outgoing interface. This takes a substantial amount of time during which no data flows over either the WLC or the PLC, especially in the case of multicast.

SUMMARY OF THE INVENTION

5 In accordance with one aspect of the invention, a pre-computed bridged routing table is used to quickly bridge a first communication interface and a second communication interface. The pre-computed bridged routing table includes the second communication interface as an outgoing interface in each routing table entry having the first communication interface as an outgoing interface. The bridged routing table is pre-computed for the pair of communication interfaces by searching a main routing table for all main routing table entries having the first communication interface as an outgoing interface and creating, for each such main routing table entry, a corresponding bridged routing table entry including all outgoing interfaces from the main routing table entry and additionally including the second (bridged) communication interface as an outgoing interface. Bridged routing tables may be pre-computed for multiple potential communication interface pairs.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The foregoing and other objects and advantages of the invention will be appreciated more fully from the following further description thereof with reference to the accompanying drawings wherein:

25 FIG. 1 is a block diagram showing the relevant components of an exemplary networking device in accordance with an embodiment of the present invention;

FIG. 2 is a block diagram that demonstrates the relationship between the line cards and the switching fabric of an exemplary networking device in accordance with an embodiment of the present invention;

30 FIG. 3 is a block diagram showing the relevant components of an exemplary line card in accordance with an embodiment of the present invention;

FIG. 4A shows an exemplary main routing table in accordance with an embodiment of the present invention;

FIG. 4B shows an exemplary main routing vector in accordance with an embodiment of the present invention;

FIG. 5A shows an exemplary bridged routing table for a [Slot1,Slot2] pair in accordance with an embodiment of the present invention;

5 FIG. 5B shows an exemplary bridged routing vector for a [Slot1,Slot2] pair in accordance with an embodiment of the present invention;

FIG. 6A shows an exemplary bridged routing table for a [Slot5,Slot6] pair in accordance with an embodiment of the present invention;

10 FIG. 6B shows an exemplary bridged routing vector for a [Slot5,Slot6] pair in accordance with an embodiment of the present invention;

FIG. 7A shows an exemplary bridged routing table for a [Slot7,Slot8] pair in accordance with an embodiment of the present invention;

FIG. 7B shows an exemplary bridged routing vector for a [Slot7,Slot8] pair in accordance with an embodiment of the present invention;

15 FIG. 8A shows an exemplary bridged routing table for a [Slot9,SlotA] pair in accordance with an embodiment of the present invention;

FIG. 8B shows an exemplary bridged routing vector for a [Slot9,SlotA] pair in accordance with an embodiment of the present invention;

20 FIG. 9A shows an exemplary bridged routing table for a [Slot1,SlotE] pair in accordance with an embodiment of the present invention;

FIG. 9B shows an exemplary bridged routing vector for a [Slot1,SlotE] pair in accordance with an embodiment of the present invention;

FIG. 10A shows an exemplary bridged routing table for a [Slot5,SlotE] pair in accordance with an embodiment of the present invention;

25 FIG. 10B shows an exemplary bridged routing vector for a [Slot5,SlotE] pair in accordance with an embodiment of the present invention;

FIG. 11A shows an exemplary bridged routing table for a [Slot7,SlotE] pair in accordance with an embodiment of the present invention;

30 FIG. 11B shows an exemplary bridged routing vector for a [Slot7,SlotE] pair in accordance with an embodiment of the present invention;

FIG. 12A shows an exemplary bridged routing table for a [Slot9,SlotE] pair in accordance with an embodiment of the present invention;

FIG. 12B shows an exemplary bridged routing vector for a [Slot9,SlotE] pair in accordance with an embodiment of the present invention;

5 FIG. 13 is a system diagram showing a networking device in communication with various external devices in accordance with an embodiment of the present invention;

FIG. 14 is a system diagram showing a networking device in communication with various external devices using bridges in accordance with an embodiment of the present invention in which each working line card is protected by a different protection line card;

10 FIG. 15 is a system diagram showing a networking device in communication with various external devices using a bridge in accordance with an embodiment of the present invention in which a single protection line card is used to protect multiple working line cards;

15 FIG. 16 is a logic flow diagram showing exemplary logic for quickly bridging a pair of line cards in accordance with an embodiment of the present invention;

FIG. 17 is a logic flow diagram showing exemplary logic for pre-computing a bridged routing table for a predetermined pair of line cards in accordance with an embodiment of the present invention; and

20 FIG. 18 is a logic flow diagram showing exemplary protection switching logic that uses a pre-computed bridged routing table in accordance with an embodiment of the present invention.

25 **DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT**

In an embodiment of the present invention, bridged routing table entries are pre-computed (i.e., before a failure is detected) for each of a number of potential WLC/PLC pairs. Specifically, for each potential WLC/PLC pair, a corresponding bridged routing table entry including the PLC as an outgoing interface is created for each routing table entry having the WLC as an outgoing interface. For convenience, the pre-computed

30

bridged routing table entries associated with a particular WLC/PLC pair is referred to hereinafter as a “bridged routing table.”

The bridged routing tables are typically distributed to all line cards before a failure is detected. Each line card typically stores the bridged routing tables locally in a memory for subsequent use performing protection switching. The line cards do not update their respective routing tables based upon the bridged routing tables until a failure is detected.

When a failure is detected for a particular WLC, the bridged routing table associated with the appropriate WLC/PLC pair is retrieved from the memory and is used to establish a temporary bridge between the WLC and the PLC. Specifically, each line card updates its routing table based upon the pre-computed routing table entries so that its routing table includes the PLC as an outgoing interface in all routing table entries having the corresponding WLC as an outgoing interface.

By pre-computing the bridged routing table entries for the bridged WLC/PLC pair, the bridged routing table entries do not have to be computed at the time the temporary bridge is being established. Therefore, the temporary bridge can be established quickly following detection of the failure.

FIG. 1 shows the relevant components of an exemplary networking device 100. Among other things, the networking device 100 includes at least one central controller 120, a number of line cards 130₁-130_N, and a number of physical cards 140₁-140_N. The central controller 120 provides management and control for the networking device 100 as a whole. A typical embodiment of the networking device 100 includes two redundant central controllers. The central controller 120 and the line cards 130₁-130_N are interconnected via a backplane 110. The backplane 110 includes, among other things, a switching fabric for high-speed communication between the line cards 130₁-130_N, a fast bus for downloading routing tables from the central controller 120 to the line cards 130₁-130_N, and a slow bus for management of the line cards 130₁-130_N by the central controller 120. The line cards 130₁-130_N are inserted into physical slots of the networking device 100. Each physical slot is associated with a slot of the switching fabric (referred to hereinafter as a “fabric slot”). Thus, each line card 130₁-130_N is coupled to a corresponding fabric slot.

Each line card 130₁-130_N is coupled to a respective physical card 140₁-140_N. For convenience, the combination of a line card 130 and a physical card 140 is sometimes referred to as a "circuit pack group." The line cards 130₁-130_N provide various networking services for communicating with various external devices. Exemplary line card types include Internet Protocol (IP) and Asynchronous Transfer Mode (ATM). The physical cards 140₁-140_N provide physical interfaces for communicating with various external devices. Exemplary physical card types include Ethernet and SONET. Exemplary circuit pack groups include ATM-over-SONET and IP-over-SONET.

FIG. 2 shows the line cards 130₁-130_N coupled to the switching fabric of the backplane 110. Each line card 130₁-130_N is associated with a corresponding fabric slot, and interfaces with the switching fabric through a number of fabric ports. Each line card 130₁-130_N also includes a number of slot ports. In the example shown in FIG. 2, each line card 130₁-130_N is coupled to its corresponding fabric slot via two fabric ports (fabric port 1 and fabric port 2), and each line card 130₁-130_N includes four slot ports (slot port 1, slot port 2, slot port 3, and slot port 4). It should be noted that each line card 130₁-130_N may be coupled to the switching fabric via one or more fabric ports, and may have one or more slot ports.

Within the networking device 100, the switching fabric routes information between the various line cards. Specifically, the switching fabric is capable of routing a packet from an incoming line card to one or more destination line cards based upon a header that is added to the packet by the incoming line card. The header identifies one or more destination slots for the packet. The header may also indicate the destination fabric port for each destination slot and the destination slot port(s) for each destination slot.

Each line card 130₁-130_N includes logic for receiving, processing, and transmitting packets. Each line card can receive and transmit packets over its fabric port(s) and over its slot port(s). Each line card maintains a routing table that is typically distributed to the line cards 130₁-130_N by the central controller 120. The routing table includes a number of routing table entries, where each routing table entry indicates, among other things, the outgoing interface(s) associated with a particular destination. An outgoing interface can be a slot port on the same line card as indicated by a slot port number, a different line card

as indicated by a slot number, or a specific fabric port on a different line card as indicated by a slot number/fabric port number pair.

FIG. 3 shows the relevant components of an exemplary line card 130. Among other things, the line card 130 includes a core processor 310, at least one routing switch processor (RSP) 320 for processing packets, an RSP memory 330 for storing the routing table, fabric port(s) 340, and slot port(s) 350. The RSP 320 is an Application Specific Integrated Circuit (ASIC) that is essentially a fast-forwarding engine including, among other things, inbound filtering logic, outbound filtering logic, policy filtering logic, Committed Information Rate (CIR) logic, and Type of Service (TOS) logic. The RSP memory 330 is used to store the routing table. The core processor 310 provides management and control for the line card 130, and includes logic for receiving the routing table from the central controller 120 over the fast bus, storing the routing table in the RSP memory 330, and configuring the RSP 320 based upon predetermined configuration information. It should be noted that FIG. 3 does not show all components of the line card 130, nor does it show all connections between components.

When a packet is received from a slot port 350, the RSP 320 uses the routing table in the RSP memory 330 to determine the outgoing interface(s) for the packet. Assuming that the packet needs to be forwarded to at least one other line card, the RSP 320 creates a header for the packet indicating at least the destination slot(s) for the packet, adds the header to the packet, and forwards the packet to the switching fabric over a fabric port 340.

FIG. 4A shows an exemplary routing table 400 having three multicast routes. Each multicast route is associated with a particular (source, group) pair. Route 1 is associated with a (S1,G1) pair, and has, as its outgoing interfaces 410, slots 1, 5, 7, 9, B, and C. Route 2 is associated with a (S2,G2) pair, and has, as its outgoing interfaces 420, slots 5, 7, and 9. Route 3 is associated with a (S3,G3) pair, and has, as its outgoing interfaces 430, slots 1, 5, B, and C. In the exemplary routing table 400, slot B and slot C are already bridged, such that slot C is included as an outgoing interface in each routing table entry (410, 430) that includes slot B as an outgoing interface. The routing table 400 is referred to hereinafter as the "main" routing table in order to distinguish it from bridged routing tables established in various embodiments of the invention.

-10-

A routing vector is typically maintained for each route in the main routing table 400. Each routing vector indicates the fabric slots and slot ports associated with its corresponding route. The routing vectors are used by the line cards 130₁-130_N to create headers for sending packets over the switching fabric.

FIG. 4B shows an exemplary routing vector 440 for Route 1 in the main routing table 400. The routing vector 440 indicates the fabric slots associated with Route 1 in the main routing table 400, and also indicates the slot port(s) for each fabric slot. Specifically, the routing vector 440 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, and slot port 2 for fabric slot C. The routing vector 440 is referred to hereinafter as the "main" routing vector for Route 1 in the main routing table 400 in order to distinguish it from bridged routing vectors established in various embodiments of the present invention described below. It should be noted that a similar routing vector would be established for Route 2 and Route 3 in the main routing table 400.

In an embodiment of the present invention, a bridged routing table is pre-computed for each of a number of potential WLC/PLC pairs. In order to create a bridged routing table for a particular WLC/PLC pair, the main routing table 400 is traversed, and each routing table entry having the WLC as an outgoing interface is copied into the bridged routing table and the PLC is added as an outgoing interface. A reference is maintained to the corresponding routing table entry in the main routing table 400. A corresponding bridged routing vector identifying the slot ports for the PLC (corresponding to the slots ports for the WLC) is also created. The bridged routing tables and bridged routing vectors are not stored in the RSP memories until a bridge is established, but are instead stored in a general purpose memory accessible to the central controller 120 and/or the line cards 130₁-130_N.

Various aspects of the present invention can be demonstrated by example.

In a first example, each WLC is protected by a different PLC. Specifically, slot 2 is used as a backup for slot 1, slot 6 is used as a backup for slot 5, slot 8 is used as a backup for slot 7, and slot A is used as a backup for slot 9. As in the prior example, slots B and C are already bridged, with slot C acting as a backup for slot B. Thus, bridged

routing tables are pre-computed for the [Slot1,Slot2] pair, the [Slot5,Slot6] pair, the [Slot7,Slot8] pair, and the [Slot9,SlotA] pair. A corresponding bridged routing vector is created for each bridged routing table. There is no need to compute a bridged routing table and bridged routing vector for the [SlotB,SlotC] pair, since slots B and C are already bridged.

FIG. 5A shows a bridged routing table 500 for the [Slot1,Slot2] pair. The bridged routing table 500 includes routes 1 and 3 from the main routing table 400. Route 1 has, as its outgoing interfaces 510, slots 1, 2, 5, 7, 9, B, and C. Route 3 has, as its outgoing interfaces 530, slots 1, 2, 5, B, and C. The bridged routing table 500 also includes corresponding references to the outgoing interfaces lists 410 and 430 in the main routing table 400.

FIG. 5B shows a bridged routing vector 540 for Route 1 of the bridged routing table 500. The bridged routing vector 540 indicates slot ports 3 and 4 for fabric slot 1, slot ports 3 and 4 for fabric slot 2 (bridged from fabric slot 1), slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, and slot port 2 for fabric slot C.

FIG. 6A shows a bridged routing table 600 for the [Slot5,Slot6] pair. The bridged routing table 600 includes routes 1, 2, and 3 from the main routing table 400. Route 1 has, as its outgoing interfaces 610, slots 1, 5, 6, 7, 9, B, and C. Route 2 has, as its outgoing interfaces 620, slots 5, 6, 7, and 9. Route 3 has, as its outgoing interfaces 630, slots 1, 5, 6, B, and C. The bridged routing table 600 also includes corresponding references to the outgoing interfaces lists 410, 420, and 430 in the main routing table 400.

FIG. 6B shows a bridged routing vector 640 for Route 1 of the bridged routing table 600. The bridged routing vector 640 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 4 for fabric slot 6 (bridged from fabric slot 5), slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, and slot port 2 for fabric slot C.

FIG. 7A shows a bridged routing table 700 for the [Slot7,Slot8] pair. The bridged routing table 700 includes routes 1 and 2 from the main routing table 400. Route 1 has, as its outgoing interfaces 710, slots 1, 5, 7, 8, 9, B, and C. Route 2 has, as its outgoing

interfaces 720, slots 5, 7, 8, and 9. The bridged routing table 700 also includes corresponding references to the outgoing interfaces lists 410 and 420 in the main routing table 400.

FIG. 7B shows a bridged routing vector 740 for Route 1 of the bridged routing table 700. The bridged routing vector 740 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot port 1 for fabric slot 8 (bridged from fabric slot 7), slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, and slot port 2 for fabric slot C.

FIG. 8A shows a bridged routing table 800 for the [Slot9,SlotA] pair. The bridged routing table 800 includes routes 1 and 2 from the main routing table 400. Route 1 has, as its outgoing interfaces 810, slots 1, 5, 7, 9, A, B, and C. Route 2 has, as its outgoing interfaces 820, slots 5, 7, 9, and A. The bridged routing table 800 also includes corresponding references to the outgoing interfaces lists 410 and 420 in the main routing table 400.

FIG. 8B shows a bridged routing vector 840 for Route 1 of the bridged routing table 800. The bridged routing vector 840 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot ports 1 and 2 for fabric slot A (bridged from fabric slot 9), slot port 2 for fabric slot B, and slot port 2 for fabric slot C.

In a second example, a single PLC is used as a backup for multiple WLCs. Specifically, slot E is used as a backup for slots 1, 5, 7, and 9. As in the prior examples, slots B and C are already bridged, with slot C acting as a backup for slot B. Thus, bridged routing tables are pre-computed for the [Slot1,SlotE] pair, the [Slot5,SlotE] pair, the [Slot7,SlotE] pair, and the [Slot9,SlotE] pair. A corresponding bridged routing vector is created for each bridged routing table. There is no need to compute a bridged routing table and bridged routing vector for the [SlotB,SlotC] pair, since slots B and C are already bridged.

FIG. 9A shows a bridged routing table 900 for the [Slot1,SlotE] pair. The bridged routing table 900 includes routes 1 and 3 from the main routing table 400. Route 1 has, as its outgoing interfaces 910, slots 1, 5, 7, 9, B, C, and E. Route 3 has, as its outgoing

interfaces 930, slots 1, 5, B, C, and E. The bridged routing table 900 also includes corresponding references to the outgoing interfaces lists 410 and 430 in the main routing table 400.

FIG. 9B shows a bridged routing vector 940 for Route 1 of the bridged routing table 900. The bridged routing vector 940 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, slot port 2 for fabric slot C, and slot ports 3 and 4 for fabric slot E (bridged from fabric slot 1).

FIG. 10A shows a bridged routing table 1000 for the [Slot5,SlotE] pair. The bridged routing table 1000 includes routes 1, 2, and 3 from the main routing table 400. Route 1 has, as its outgoing interfaces 1010, slots 1, 5, 7, 9, B, C, and E. Route 2 has, as its outgoing interfaces 1020, slots 5, 7, 9, and E. Route 3 has, as its outgoing interfaces 1030, slots 1, 5, B, C, and E. The bridged routing table 1000 also includes corresponding references to the outgoing interfaces lists 410, 420, and 430 in the main routing table 400.

FIG. 10B shows a bridged routing vector 1040 for Route 1 of the bridged routing table 1000. The bridged routing vector 1040 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, slot port 2 for fabric slot C, and slot port 4 for fabric slot E (bridged from fabric slot 5).

FIG. 11A shows a bridged routing table 1100 for the [Slot7,SlotE] pair. The bridged routing table 1100 includes routes 1 and 2 from the main routing table 400. Route 1 has, as its outgoing interfaces 1110, slots 1, 5, 7, 9, B, C, and E. Route 2 has, as its outgoing interfaces 1120, slots 5, 7, 9, and E. The bridged routing table 1100 also includes corresponding references to the outgoing interfaces lists 410 and 420 in the main routing table 400.

FIG. 11B shows a bridged routing vector 1140 for Route 1 of the bridged routing table 1100. The bridged routing vector 1140 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, slot port 2 for fabric slot C, and slot port 1 for fabric slot E (bridged from fabric slot 7).

-14-

FIG. 12A shows a bridged routing table 1200 for the [Slot9,SlotE] pair. The bridged routing table 1200 includes routes 1 and 2 from the main routing table 400. Route 1 has, as its outgoing interfaces 1210, slots 1, 5, 7, 9, B, C, and E. Route 2 has, as its outgoing interfaces 1220, slots 5, 7, 9, and E. The bridged routing table 1200 also includes corresponding references to the outgoing interfaces lists 410 and 420 in the main routing table 400.

FIG. 12B shows a bridged routing vector 1240 for Route 1 of the bridged routing table 1200. The bridged routing vector 1240 indicates slot ports 3 and 4 for fabric slot 1, slot port 4 for fabric slot 5, slot port 1 for fabric slot 7, slot ports 1 and 2 for fabric slot 9, slot port 2 for fabric slot B, slot port 2 for fabric slot C, and slot ports 1 and 2 for fabric slot E (bridged from fabric slot 9).

FIG. 13 shows an exemplary communication system 1300 in which the networking device 100 is coupled to various external devices. The networking device 100 is coupled via slot 1 to external device 1310. The networking device 100 is coupled via slot 5 to external device 1320. The networking device 100 is coupled via slot 7 to external device 1330. The networking device 100 is coupled via slot 9 to external device 1340. For the sake of simplicity, network connections involving slots B and C of the networking device 100 are not shown.

FIG. 14 shows an exemplary communication system 1400 in which each WLC is protected by a different PLC as in the first example described above. Because each WLC is protected by a different PLC, failures affecting multiple WLCs can be bypassed by establishing the appropriate bridges. A temporary bridge 1410 is established between slots 1 and 2 using the bridged routing table 500 in order to bypass a failure affecting communication with external device 1310 over slot 1. A temporary bridge 1420 is established between slots 5 and 6 using the bridged routing table 600 in order to bypass a failure affecting communication with external device 1320 over slot 5. A temporary bridge 1430 is established between slots 7 and 8 using the bridged routing table 700 in order to bypass a failure affecting communication with external device 1330 over slot 7. A temporary bridge 1440 is established between slots 9 and A using the bridged routing table

-15-

800 in order to bypass a failure affecting communication with external device 1340 over slot 9.

FIG. 15 shows an exemplary communication system 1500 in which a single PLC is used to protect multiple WLCs, as in the second example above. Because a single PLC is used to protect multiple WLCs, only one WLC can be protected at any given time. In this example, a failure affecting communication with external device 1340 over slot 9 is bypassed by establishing a temporary bridge 1510 between slots 9 and E using the bridged routing table 1200. As long as the temporary bridge between slots 9 and E is active, failures affecting communication over slots 1, 5, and 7 cannot be protected using slot E.

FIG. 16 shows exemplary logic 1600 for quickly bridging a pair of line cards. Beginning in block 1602, the logic pre-computes bridged routing table entries for a predetermined pair of line cards, in block 1604. The logic typically stores the pre-computed bridged routing table entries, in block 1606. The logic subsequently uses the pre-computed bridged routing table entries to establish a bridge between the predetermined pair of line cards, in block 1608. The logic 1600 terminates in block 1699.

FIG. 17 shows exemplary logic 1700 for pre-computing a bridged routing table for a particular WLC/PLC pair. Beginning in block 1702, the logic obtains a routing table entry from the main routing table, in block 1704, and determines whether the routing table entry includes the WLC as an outgoing interface, in block 1706. If the routing table entry does not include the WLC as an outgoing interface (NO in block 1708), then the logic proceeds to block 1716. If the routing table entry does include the WLC as an outgoing interface (YES in block 1708), then the logic copies the routing table entry as a bridged routing table entry into the bridged routing table for the WLC/PLC pair, in block 1710, adds the PLC as an outgoing interface of the bridged routing table entry, in block 1712, creates a bridged routing vector identifying the slot ports for the PLC (corresponding to the slot ports for the WLC), in block 1714, and proceeds to block 1716. In block 1716, the logic determines whether there are any additional routing table entries in the main routing table. If there are additional routing table entries in the main routing table (YES in block 1716), then the logic recycles to block 1704 to process another routing table entry of the

main routing table. If there are no additional routing table entries in the main routing table (NO in block 1716), then the logic terminates in block 1799.

FIG. 18 shows exemplary protection switching logic 1800 that uses a pre-computed bridged routing table. Beginning in block 1802, and upon detecting a failure affecting a WLC, in block 1804, the logic determines a PLC to back up the WLC, in block 1806. The logic then obtains a pre-computed bridged routing table for the WLC/PLC pair, in block 1808. It should be noted that there may be multiple bridged routing tables associated with a particular WLC, with each bridged routing table using a different PLC. After obtaining the bridged routing table for the WLC/PLC pair, in block 1808, the logic establishes a bridge between the WLC and the PLC using the pre-computed bridged routing table, in block 1810. Establishing the bridge may involve, among other things, distributing the pre-computed bridged routing table to all line cards. The logic 1800 terminates in block 1899.

It should be noted that, although various embodiments of the present invention are described with reference to multicast routes, the present invention is in no way limited to bridging multicast routes. The bridging mechanism described herein can be used for bridging of both unicast and multicast routes.

It should be noted that terms such as "switch" and "router" are used herein to describe various communication devices that may be used in a communication system, and should not be construed to limit the present invention to any particular communication device type. Thus, a communication device may include, without limitation, a bridge, router, bridge-router (brouter), switch, node, or other communication device.

It should also be noted that the term "packet" is used herein to describe a communication message that may be used by a communication device (e.g., created, transmitted, received, stored, or processed by the communication device) or conveyed by a communication medium, and should not be construed to limit the present invention to any particular communication message type, communication message format, or communication protocol. Thus, a communication message may include, without limitation, a frame, packet, datagram, user datagram, cell, or other type of communication message.

-17-

It should also be noted that the logic flow diagrams are used herein to demonstrate various aspects of the invention, and should not be construed to limit the present invention to any particular logic flow or logic implementation. The described logic may be partitioned into different logic blocks (e.g., programs, modules, functions, or subroutines) without changing the overall results or otherwise departing from the true scope of the invention. Often times, logic elements may be added, modified, omitted, performed in a different order, or implemented using different logic constructs (e.g., logic gates, looping primitives, conditional logic, and other logic constructs) without changing the overall results or otherwise departing from the true scope of the invention.

The present invention may be embodied in many different forms, including, but in no way limited to, computer program logic for use with a processor (e.g., a microprocessor, microcontroller, digital signal processor, or general purpose computer), programmable logic for use with a programmable logic device (e.g., a Field Programmable Gate Array (FPGA) or other PLD), discrete components, integrated circuitry (e.g., an Application Specific Integrated Circuit (ASIC)), or any other means including any combination thereof. In a typical embodiment of the present invention, predominantly all of the logic for pre-computing bridged routing tables, storing the pre-computed bridged routing tables, and using the pre-computed bridged routing tables for protection switching or otherwise is implemented as a set of computer program instructions that is converted into a computer executable form, stored as such in a computer readable medium, and executed by a microprocessor within the networking device 100 under the control of an operating system.

Computer program logic implementing all or part of the functionality previously described herein may be embodied in various forms, including, but in no way limited to, a source code form, a computer executable form, and various intermediate forms (e.g., forms generated by an assembler, compiler, linker, or locator). Source code may include a series of computer program instructions implemented in any of various programming languages (e.g., an object code, an assembly language, or a high-level language such as Fortran, C, C++, JAVA, or HTML) for use with various operating systems or operating environments. The source code may define and use various data structures and communication messages.

The source code may be in a computer executable form (*e.g.*, via an interpreter), or the source code may be converted (*e.g.*, via a translator, assembler, or compiler) into a computer executable form.

5 The computer program may be fixed in any form (*e.g.*, source code form, computer executable form, or an intermediate form) either permanently or transitorily in a tangible storage medium, such as a semiconductor memory device (*e.g.*, a RAM, ROM, PROM, EEPROM, or Flash-Programmable RAM), a magnetic memory device (*e.g.*, a diskette or fixed disk), an optical memory device (*e.g.*, a CD-ROM), or other memory device. The computer program may be fixed in any form in a signal that is transmittable to a computer using any of various communication technologies, including, but in no way limited to, 10 analog technologies, digital technologies, optical technologies, wireless technologies, networking technologies, and internetworking technologies. The computer program may be distributed in any form as a removable storage medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the communication system (*e.g.*, the Internet or World Wide Web).

15 Hardware logic (including programmable logic for use with a programmable logic device) implementing all or part of the functionality previously described herein may be designed using traditional manual methods, or may be designed, captured, simulated, or documented electronically using various tools, such as Computer Aided Design (CAD), a hardware description language (*e.g.*, VHDL or AHDL), or a PLD programming language (*e.g.*, PALASM, ABEL, or CUPL).

20 Programmable logic may be fixed either permanently or transitorily in a tangible storage medium, such as a semiconductor memory device (*e.g.*, a RAM, ROM, PROM, EEPROM, or Flash-Programmable RAM), a magnetic memory device (*e.g.*, a diskette or fixed disk), an optical memory device (*e.g.*, a CD-ROM), or other memory device. The programmable logic may be fixed in a signal that is transmittable to a computer using any of various communication technologies, including, but in no way limited to, analog 25 technologies, digital technologies, optical technologies, wireless technologies, networking technologies, and internetworking technologies. The programmable logic may be 30

distributed as a removable storage medium with accompanying printed or electronic documentation (*e.g.*, shrink wrapped software), preloaded with a computer system (*e.g.*, on system ROM or fixed disk), or distributed from a server or electronic bulletin board over the communication system (*e.g.*, the Internet or World Wide Web).

5 Thus, the present invention may be embodied as a method for bridging network traffic in a networking device having a plurality of communication interfaces such as line cards. The method involves creating a bridged routing entry for bridging a first communication interface and a second communication interface before requiring a bridge between the predetermined pair of communication interfaces, subsequently determining
10 that a bridge is needed between the first communication interface and the second communication interface, and establishing the bridge between the first communication interface and the second communication interface using the bridged routing entry. Creating the bridged routing entry for bridging the first communication interface and the second communication interface involves adding the second communication interface as
15 an outgoing interface to a routing entry having the first communication interface as an outgoing interface, and may also involve creating a bridged routing vector for bridging the first communication interface and the second communication interface. Determining that the bridge is needed between the first communication interface and the second communication interface typically involves detecting a failure affecting communication
20 over the first communication interface.

 The present invention may also be embodied as a method for bridging network traffic in a networking device having a plurality of communication interfaces such as line cards. The method involves creating a bridged routing table for bridging a first
25 communication interface and a second communication interface before requiring a bridge between the predetermined pair of communication interfaces, subsequently determining that a bridge is needed between the first communication interface and the second communication interface, and establishing the bridge between the first communication interface and the second communication interface using the bridged routing table. Creating the bridged routing table for bridging the first communication interface and the
30 second communication interface involves finding in a main routing table a number of main

-20-

routing entries having the first communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the second communication interface as an outgoing interface. Creating a corresponding bridged routing entry for a main routing involves copying the main routing entry as a bridged routing entry into the bridged routing table and adding the second communication interface as an outgoing interface to the bridged routing entry, and may also involve creating a bridged routing vector for the bridged routing entry. Creating the corresponding bridged routing entry for the main routing entry involves including in the bridged routing entry a reference to the main routing entry in the main routing table. Determining that the bridge is needed between the first communication interface and the second communication interface typically involves detecting a failure affecting communication over the first communication interface.

The present invention may also be embodied as a method for protection switching in a networking device having a plurality of communication interfaces such as line cards. The method involves pre-establishing a bridged routing table for each of a number of communication interface pairs, where each communication interface pair represents a working communication interface and a corresponding protection communication interface from among the plurality of communication interfaces, detecting a failure affecting communication over a working communication interface, determining a protection communication interface to protect the working communication interface, obtaining the pre-established bridged routing table for the communication interface pair associated with the working communication interface and the protection communication interface, and bridging the protection communication interface to the working communication interface using the pre-established bridged routing table for the communication interface pair associated with the working communication interface and the protection communication interface. Pre-establishing a bridged routing table for a communication interface pair involves finding in a main routing table a number of main routing entries having the working communication interface as an outgoing interface and creating in the bridged

routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the protection communication interface as an outgoing interface. Creating a corresponding bridged routing entry for a main routing entry involves copying the main routing entry as a bridged routing entry into the bridged routing table and adding the protection communication interface as an outgoing interface to the bridged routing entry, and may also involve creating a bridged routing vector for the bridged routing entry. Creating the corresponding bridged routing entry for the main routing entry involves including in the bridged routing entry a reference to the main routing entry in the main routing table.

The present invention may also be embodied as an apparatus having a plurality of communication interfaces such as line cards, bridge pre-establishment logic operably coupled to create a bridged routing entry for bridging a first communication interface and a second interface from among the plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface, and bridge establishment logic operably coupled to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing entry upon determining that a bridge is needed between the first communication interface and the second communication interface. The bridge pre-establishment logic is operably coupled to create the bridged routing entry by adding the second communication interface as an outgoing interface to a routing entry having the first communication interface as an outgoing interface. The bridge pre-establishment logic may also be operably coupled to create a bridged routing vector for bridging the first communication interface and the second communication interface. The bridge establishment logic is operably coupled to establish the bridge upon detecting a failure affecting communication over the first communication interface.

The present invention may also be embodied as a computer program for controlling a computer system. The computer program includes bridge pre-establishment logic programmed to create a bridged routing entry for bridging a first communication interface and a second interface from among a plurality of communication interfaces before a bridge

is needed between the first communication interface and the second interface and bridge establishment logic programmed to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing entry upon determining that a bridge is needed between the first communication interface and the second communication interface. The bridge pre-establishment logic is programmed to create the bridged routing entry by adding the second communication interface as an outgoing interface to a routing entry having the first communication interface as an outgoing interface. The bridge pre-establishment logic may also be programmed to create a bridged routing vector for bridging the first communication interface and the second communication interface. The bridge establishment logic is programmed to establish the bridge upon detecting a failure affecting communication over the first communication interface. The computer program may be embodied in a computer readable medium or in a data signal.

The present invention may also be embodied as an apparatus having a plurality of communication interfaces such as line cards, bridge pre-establishment logic operably coupled to create a bridged routing table for bridging a first communication interface and a second interface from among a plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface, and bridge establishment logic operably coupled to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing table upon determining that a bridge is needed between the first communication interface and the second communication interface. The bridge pre-establishment logic is operably coupled to create the bridged routing table by finding in a main routing table a number of main routing entries having the first communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the second communication interface as an outgoing interface. The bridge pre-establishment logic is operably coupled to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged

routing entry into the bridged routing table and adding the second communication interface as an outgoing interface to the bridged routing entry. The bridge pre-establishment logic may also be operably coupled to create a bridged routing vector for the bridged routing entry. The bridge pre-establishment logic is operably coupled to include in the bridged routing entry a reference to the main routing entry in the main routing table. The bridge establishment logic is operably coupled to establish the bridge upon detecting a failure affecting communication over the first communication interface.

The present invention may also be embodied as a computer program for controlling a computer system. The computer program includes bridge pre-establishment logic programmed to create a bridged routing table for bridging a first communication interface and a second interface from among a plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface and bridge establishment logic programmed to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing table upon determining that a bridge is needed between the first communication interface and the second communication interface. The bridge pre-establishment logic is programmed to create the bridged routing table by finding in a main routing table a number of main routing entries having the first communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the second communication interface as an outgoing interface. The bridge pre-establishment logic is programmed to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the second communication interface as an outgoing interface to the bridged routing entry. The bridge pre-establishment logic may also be programmed to create a bridged routing vector for the bridged routing entry. The bridge pre-establishment logic is programmed to include in the bridged routing entry a reference to the main routing entry in the main routing table. The bridge establishment logic is programmed to establish the bridge upon detecting a failure affecting communication over

the first communication interface. The computer program may be embodied in a computer readable medium or in a data signal.

The present invention may also be embodied as an apparatus having a plurality of communication interfaces such as line cards, bridge pre-establishment logic operably coupled to create a bridged routing table for each of a number of communication interface
5 pairs, where each communication interface pair represents a working communication interface and a corresponding protection communication interface from among the plurality of communication interfaces, and bridge establishment logic operably coupled to establish a bridge between a working communication interface and a corresponding
10 protection communication interface using the bridged routing table associated with the working communication interface and corresponding protection communication interface upon detecting a failure affecting communication over the working communication interface. The bridge pre-establishment logic is operably coupled to create a bridged routing table for a communication interface pair by finding in a main routing table a
15 number of main routing entries having the working communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the protection communication interface as an outgoing interface. The
20 bridge pre-establishment logic is operably coupled to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the protection communication interface as an outgoing interface to the bridged routing entry. The bridge pre-establishment logic may also be operably coupled to create a bridged routing vector for the
25 bridged routing entry. The bridge pre-establishment logic is operably coupled to include in the bridged routing entry a reference to the main routing entry in the main routing table.

The present invention may also be embodied as a computer program for controlling a computer system. The computer program includes bridge pre-establishment logic programmed to create a bridged routing table for each of a number of communication
30 interface pairs, where each communication interface pair represents a working

-25-

communication interface and a corresponding protection communication interface from among the plurality of communication interfaces and bridge establishment logic programmed to establish a bridge between a working communication interface and a corresponding protection communication interface using the bridged routing table associated with the working communication interface and corresponding protection communication interface upon detecting a failure affecting communication over the working communication interface. The bridge pre-establishment logic is programmed to create a bridged routing table for a communication interface pair by finding in a main routing table a number of main routing entries having the working communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the protection communication interface as an outgoing interface. The bridge pre-establishment logic is programmed to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the protection communication interface as an outgoing interface to the bridged routing entry. The bridge pre-establishment logic may also be programmed to create a bridged routing vector for the bridged routing entry. The bridge pre-establishment logic is programmed to include in the bridged routing entry a reference to the main routing entry in the main routing table. The computer program may be embodied in a computer readable medium or in a data signal.

The present invention may be embodied in other specific forms without departing from the true scope of the invention. The described embodiments are to be considered in all respects only as illustrative and not restrictive.

I claim:

1. A method for bridging network traffic in a networking device having a plurality of communication interfaces, the method comprising:

5 creating a bridged routing entry for bridging a first communication interface and a second communication interface before requiring a bridge between the predetermined pair of communication interfaces;

subsequently determining that a bridge is needed between the first communication interface and the second communication interface; and

10 establishing the bridge between the first communication interface and the second communication interface using the bridged routing entry.

2. The method of claim 1, wherein creating the bridged routing entry for bridging the first communication interface and the second communication interface comprises:

15 adding the second communication interface as an outgoing interface to a routing entry having the first communication interface as an outgoing interface.

3. The method of claim 2, wherein creating the bridged routing entry for the first communication interface and the second communication interface further comprises:

20 creating a bridged routing vector for bridging the first communication interface and the second communication interface.

4. The method of claim 1, wherein determining that the bridge is needed between the first communication interface and the second communication interface comprises:

25 detecting a failure affecting communication over the first communication interface.

5. The method of claim 1, wherein the plurality of communication interfaces comprises a plurality of line cards.

-27-

6. A method for bridging network traffic in a networking device having a plurality of communication interfaces, the method comprising:

creating a bridged routing table for bridging a first communication interface and a second communication interface before requiring a bridge between the predetermined pair of communication interfaces;

subsequently determining that a bridge is needed between the first communication interface and the second communication interface; and

establishing the bridge between the first communication interface and the second communication interface using the bridged routing table.

7. The method of claim 6, wherein creating the bridged routing table for bridging the first communication interface and the second communication interface comprises:

finding in a main routing table a number of main routing entries having the first communication interface as an outgoing interface; and

creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the second communication interface as an outgoing interface.

8. The method of claim 7, wherein creating a corresponding bridged routing entry for a main routing entry comprises:

copying the main routing entry as a bridged routing entry into the bridged routing table; and

adding the second communication interface as an outgoing interface to the bridged routing entry.

9. The method of claim 8, wherein creating the corresponding bridged routing entry for the main routing entry comprises:

creating a bridged routing vector for the bridged routing entry.

-28-

10. The method of claim 8, wherein creating the corresponding bridged routing entry for the main routing entry comprises:

including in the bridged routing entry a reference to the main routing entry in the main routing table.

5

11. The method of claim 6, wherein determining that the bridge is needed between the first communication interface and the second communication interface comprises:

detecting a failure affecting communication over the first communication interface.

12. The method of claim 6, wherein the plurality of communication interfaces comprises a plurality of line cards.

10

-29-

13. A method for protection switching in a networking device having a plurality of communication interfaces, the method comprising:

pre-establishing a bridged routing table for each of a number of communication interface pairs, where each communication interface pair represents a working communication interface and a corresponding protection communication interface from among the plurality of communication interfaces;

detecting a failure affecting communication over a working communication interface;

determining a protection communication interface to protect the working communication interface;

obtaining the pre-established bridged routing table for the communication interface pair associated with the working communication interface and the protection communication interface; and

bridging the protection communication interface to the working communication interface using the pre-established bridged routing table for the communication interface pair associated with the working communication interface and the protection communication interface.

14. The method of claim 13, wherein pre-establishing a bridged routing table for a communication interface pair comprises:

finding in a main routing table a number of main routing entries having the working communication interface as an outgoing interface; and

creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the protection communication interface as an outgoing interface.

15. The method of claim 14, wherein creating a corresponding bridged routing entry for a main routing entry comprises:

-30-

copying the main routing entry as a bridged routing entry into the bridged routing table; and

adding the protection communication interface as an outgoing interface to the bridged routing entry.

5

16. The method of claim 15, wherein creating the corresponding bridged routing entry for the main routing entry comprises:

creating a bridged routing vector for the bridged routing entry.

17. The method of claim 15, wherein creating the corresponding bridged routing entry for the main routing entry comprises:

including in the bridged routing entry a reference to the main routing entry in the main routing table.

18. The method of claim 13, wherein the plurality of communication interfaces comprises a plurality of line cards.

-31-

19. An apparatus comprising:

a plurality of communication interfaces;

bridge pre-establishment logic operably coupled to create a bridged routing entry for bridging a first communication interface and a second interface from among the plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface; and

bridge establishment logic operably coupled to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing entry upon determining that a bridge is needed between the first communication interface and the second communication interface.

20. The apparatus of claim 19, wherein the bridge pre-establishment logic is operably coupled to create the bridged routing entry by adding the second communication interface as an outgoing interface to a routing entry having the first communication interface as an outgoing interface.

21. The apparatus of claim 20, wherein the bridge pre-establishment logic is operably coupled to create a bridged routing vector for bridging the first communication interface and the second communication interface.

22. The apparatus of claim 19, wherein the bridge establishment logic is operably coupled to establish the bridge upon detecting a failure affecting communication over the first communication interface.

23. The apparatus of claim 19, wherein the plurality of communication interfaces comprises a plurality of line cards.

-32-

24. A computer program for controlling a computer system, the computer program comprising:

bridge pre-establishment logic programmed to create a bridged routing entry for bridging a first communication interface and a second interface from among a plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface; and

bridge establishment logic programmed to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing entry upon determining that a bridge is needed between the first communication interface and the second communication interface.

25. The computer program of claim 24, wherein the bridge pre-establishment logic is programmed to create the bridged routing entry by adding the second communication interface as an outgoing interface to a routing entry having the first communication interface as an outgoing interface.

26. The computer program of claim 25, wherein the bridge pre-establishment logic is programmed to create a bridged routing vector for bridging the first communication interface and the second communication interface.

27. The computer program of claim 24, wherein the bridge establishment logic is programmed to establish the bridge upon detecting a failure affecting communication over the first communication interface.

28. The computer program of claim 24 embodied in a computer readable medium.

29. The computer program of claim 24 embodied in a data signal.

-33-

30. An apparatus comprising:

a plurality of communication interfaces;

bridge pre-establishment logic operably coupled to create a bridged routing table for bridging a first communication interface and a second interface from among a plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface; and

bridge establishment logic operably coupled to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing table upon determining that a bridge is needed between the first communication interface and the second communication interface.

31. The apparatus of claim 30, wherein the bridge pre-establishment logic is operably coupled to create the bridged routing table by finding in a main routing table a number of main routing entries having the first communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the second communication interface as an outgoing interface.

32. The apparatus of claim 31, wherein the bridge pre-establishment logic is operably coupled to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the second communication interface as an outgoing interface to the bridged routing entry.

33. The apparatus of claim 32, wherein the bridge pre-establishment logic is operably coupled to create a bridged routing vector for the bridged routing entry.

-34-

34. The apparatus of claim 32, wherein the bridge pre-establishment logic is operably coupled to include in the bridged routing entry a reference to the main routing entry in the main routing table.

5 35. The apparatus of claim 30, wherein the bridge establishment logic is operably coupled to establish the bridge upon detecting a failure affecting communication over the first communication interface.

36. The apparatus of claim 30, wherein the plurality of communication interfaces comprises a plurality of line cards.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194

-35-

37. A computer program for controlling a computer system, the computer program comprising:

bridge pre-establishment logic programmed to create a bridged routing table for bridging a first communication interface and a second interface from among a plurality of communication interfaces before a bridge is needed between the first communication interface and the second interface; and

bridge establishment logic programmed to establish a bridge between the first communication interface and the second communication interface using the pre-established bridged routing table upon determining that a bridge is needed between the first communication interface and the second communication interface.

38. The computer program of claim 37, wherein the bridge pre-establishment logic is programmed to create the bridged routing table by finding in a main routing table a number of main routing entries having the first communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the second communication interface as an outgoing interface.

39. The computer program of claim 38, wherein the bridge pre-establishment logic is programmed to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the second communication interface as an outgoing interface to the bridged routing entry.

40. The computer program of claim 39, wherein the bridge pre-establishment logic is programmed to create a bridged routing vector for the bridged routing entry.

-36-

41. The computer program of claim 39, wherein the bridge pre-establishment logic is programmed to include in the bridged routing entry a reference to the main routing entry in the main routing table.

5 42. The computer program of claim 37, wherein the bridge establishment logic is programmed to establish the bridge upon detecting a failure affecting communication over the first communication interface.

43. The computer program of claim 37 embodied in a computer readable medium.

10 44. The computer program of claim 37 embodied in a data signal.

-37-

45. An apparatus comprising:

a plurality of communication interfaces;

bridge pre-establishment logic operably coupled to create a bridged routing table for each of a number of communication interface pairs, where each communication interface pair represents a working communication interface and a corresponding protection communication interface from among the plurality of communication interfaces; and

bridge establishment logic operably coupled to establish a bridge between a working communication interface and a corresponding protection communication interface using the bridged routing table associated with the working communication interface and corresponding protection communication interface upon detecting a failure affecting communication over the working communication interface.

46. The apparatus of claim 45, wherein the bridge pre-establishment logic is operably coupled to create a bridged routing table for a communication interface pair by finding in a main routing table a number of main routing entries having the working communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the protection communication interface as an outgoing interface.

47. The apparatus of claim 46, wherein the bridge pre-establishment logic is operably coupled to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the protection communication interface as an outgoing interface to the bridged routing entry.

48. The apparatus of claim 47, wherein the bridge pre-establishment logic is operably coupled to create a bridged routing vector for the bridged routing entry.

-38-

49. The apparatus of claim 47, wherein the bridge pre-establishment logic is operably coupled to include in the bridged routing entry a reference to the main routing entry in the main routing table.

- 5 50. The apparatus of claim 45, wherein the plurality of communication interfaces comprises a plurality of line cards.

(b)
(c)
(d)
(e)
(f)
(g)
(h)
(i)
(j)
(k)
(l)
(m)
(n)
(o)
(p)
(q)
(r)
(s)
(t)
(u)
(v)
(w)
(x)
(y)
(z)

-39-

51. A computer program for controlling a computer system, the computer program comprising:

5 bridge pre-establishment logic programmed to create a bridged routing table for each of a number of communication interface pairs, where each communication interface pair represents a working communication interface and a corresponding protection communication interface from among the plurality of communication interfaces; and

10 bridge establishment logic programmed to establish a bridge between a working communication interface and a corresponding protection communication interface using the bridged routing table associated with the working communication interface and corresponding protection communication interface upon detecting a failure affecting communication over the working communication interface.

15 52. The computer program of claim 51, wherein the bridge pre-establishment logic is programmed to create a bridged routing table for a communication interface pair by finding in a main routing table a number of main routing entries having the working communication interface as an outgoing interface and creating in the bridged routing table a corresponding bridged routing entry for each of said number of main routing entries, wherein each bridged routing entry includes all outgoing interfaces from its corresponding main routing entry and further includes the protection communication interface as an outgoing interface.

20 53. The computer program of claim 52, wherein the bridge pre-establishment logic is programmed to create a corresponding bridged routing entry for a main routing entry by copying the main routing entry as a bridged routing entry into the bridged routing table and adding the protection communication interface as an outgoing interface to the bridged routing entry.

25 54. The computer program of claim 53, wherein the bridge pre-establishment logic is programmed to create a bridged routing vector for the bridged routing entry.

-40-

55. The computer program of claim 53, wherein the bridge pre-establishment logic is programmed to include in the bridged routing entry a reference to the main routing entry in the main routing table.

5 56. The computer program of claim 51 embodied in a computer readable medium.

57. The computer program of claim 51 embodied in a data signal.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
219

ABSTRACT OF THE DISCLOSURE

A system, device, and method for bridging network traffic between a first communication interface and a second communication interface uses a pre-computed bridged routing table to enable a bridge to be established quickly. The pre-computed bridged routing table includes the second communication interface as an outgoing interface in each routing table entry having the first communication interface as an outgoing interface. The bridged routing table is pre-computed for the pair of communication interfaces by searching a main routing table for all main routing table entries having the first communication interface as an outgoing interface and creating, for each such main routing table entry, a corresponding bridged routing table entry including all outgoing interfaces from the main routing table entry and additionally including the second (bridged) communication interface as an outgoing interface. Bridged routing tables may be pre-computed for multiple potential communication interface pairs.

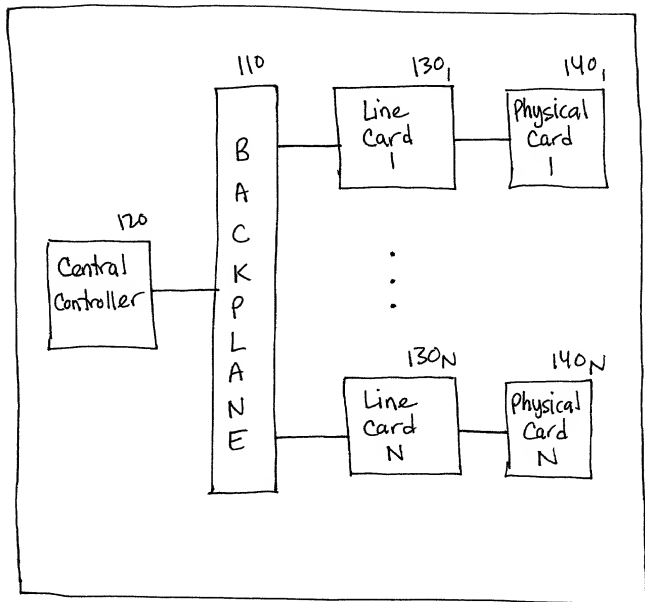


FIG. 1

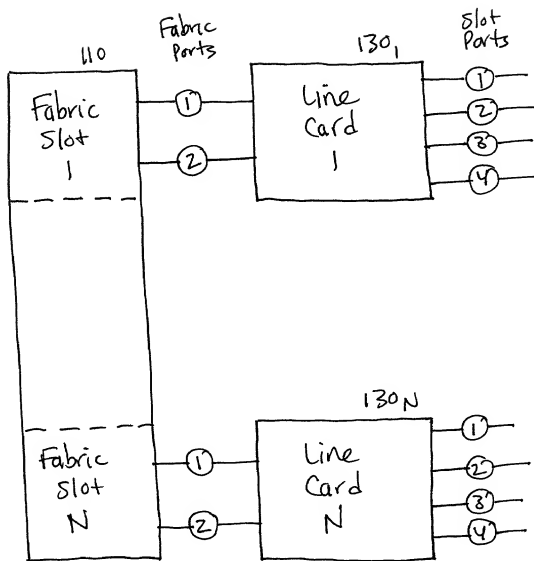


FIG. 2

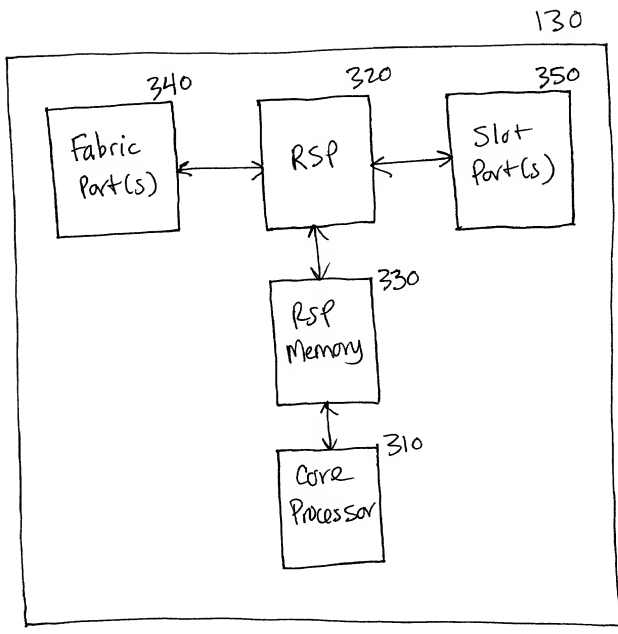


FIG. 3

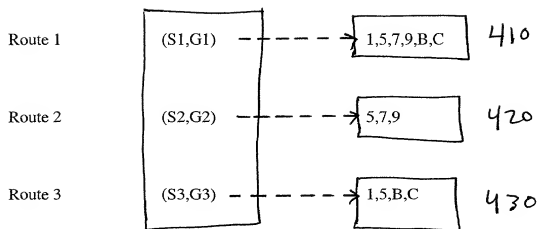


FIG. 4A - Main Routing Table

400

[illegible]

FIG. 4B - Main Routing Vector

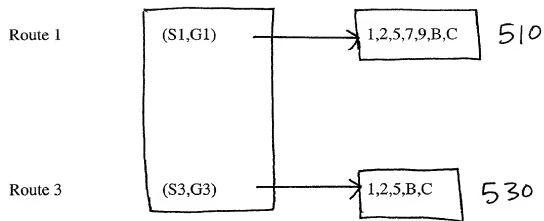


FIG. 5A - Bridged Routing Table [Slot1,Slot2]

500

[illegible]

540

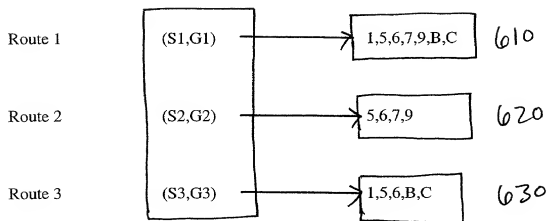


FIG. 6A - Bridged Routing Table [Slot5,Slot6]

600

SLE	SLD	SLC	SLB	SLA	SL9	SL8	SL7	SL6	SL5	SL4	SL3	SL2	SL1

FIG. 6B - Bridged Routing Vector [Slot5,Slot6]

640

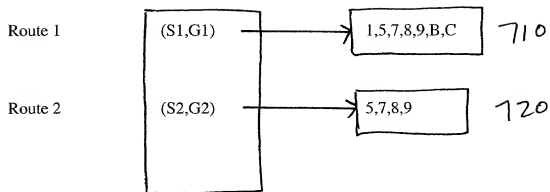


FIG. 7A - Bridged Routing Table [Slot7,Slot8]

700

[illegible]

FIG. 7B - Bridged Routing Vector [Slot7,Slot8]

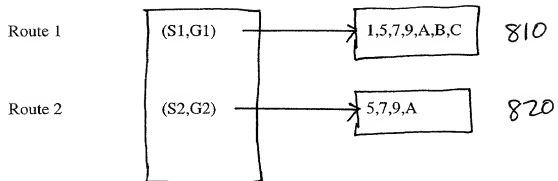


FIG. 8A - Bridged Routing Table [Slot9,SlotA]

800

[illegible]

840

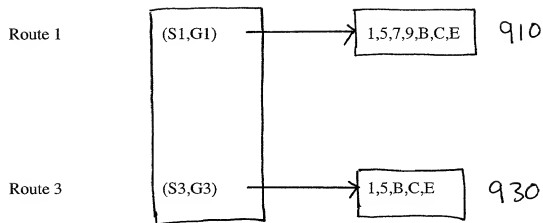


FIG. 9A - Bridged Routing Table [Slot1,SlotE]

900

[illegible]

940

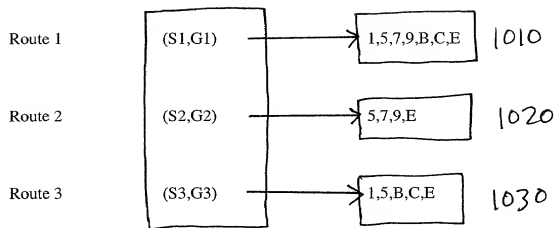


FIG. 10A - Bridged Routing Table [Slot5,SlotE]

1000

[illegible]

FIG. 10B - Bridged Routing Vector [Slot5,SlotE]

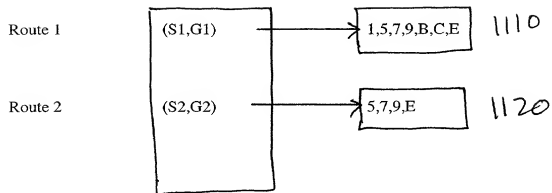


FIG. 11A - Bridged Routing Table [Slot7,SlotE]

1100

[illegible]

1140

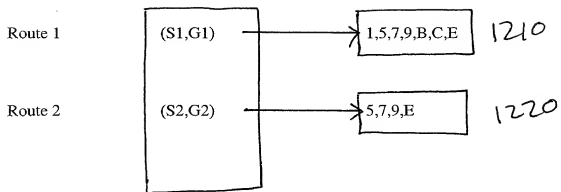


FIG. 12A - Bridged Routing Table [Slot9,SlotE]

1200

SLE	SLD	SLC	SLB	SLA	SL9	SL8	SL7	SL6	SL5	SL4	SL3	SL2	SL1

FIG. 12B - Bridged Routing Vector [Slot9,SlotE]

1240

FIG. 12A
FIG. 12B
FIG. 12C
FIG. 12D
FIG. 12E
FIG. 12F
FIG. 12G
FIG. 12H
FIG. 12I
FIG. 12J
FIG. 12K
FIG. 12L
FIG. 12M
FIG. 12N
FIG. 12O
FIG. 12P
FIG. 12Q
FIG. 12R
FIG. 12S
FIG. 12T
FIG. 12U
FIG. 12V
FIG. 12W
FIG. 12X
FIG. 12Y
FIG. 12Z

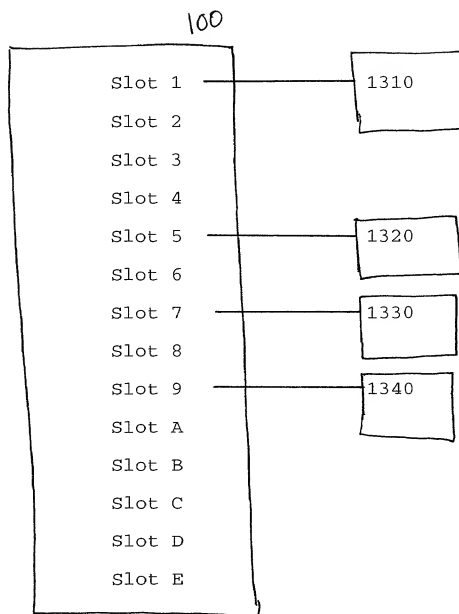


FIG. 13

1300

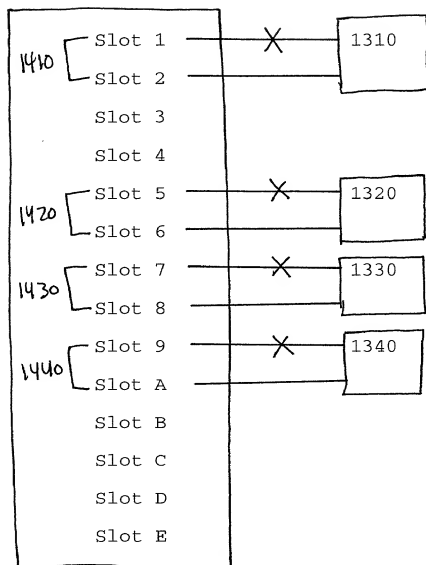


FIG. 14

1400

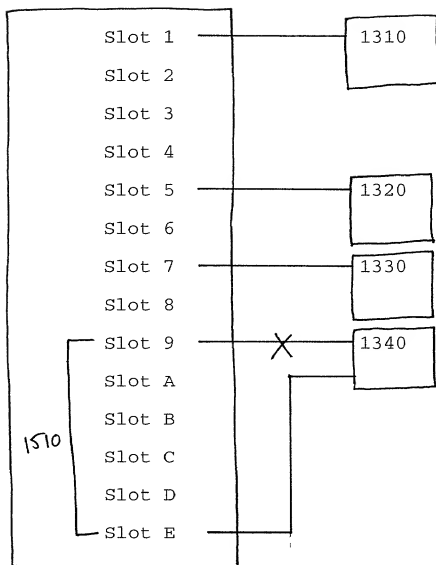


FIG. 15 1500

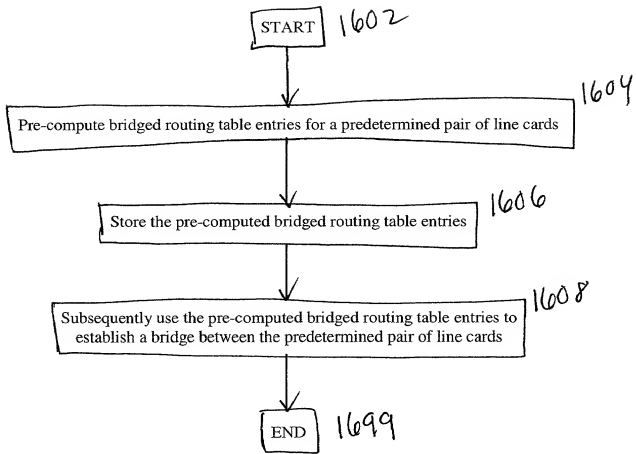


FIG. 16

1600

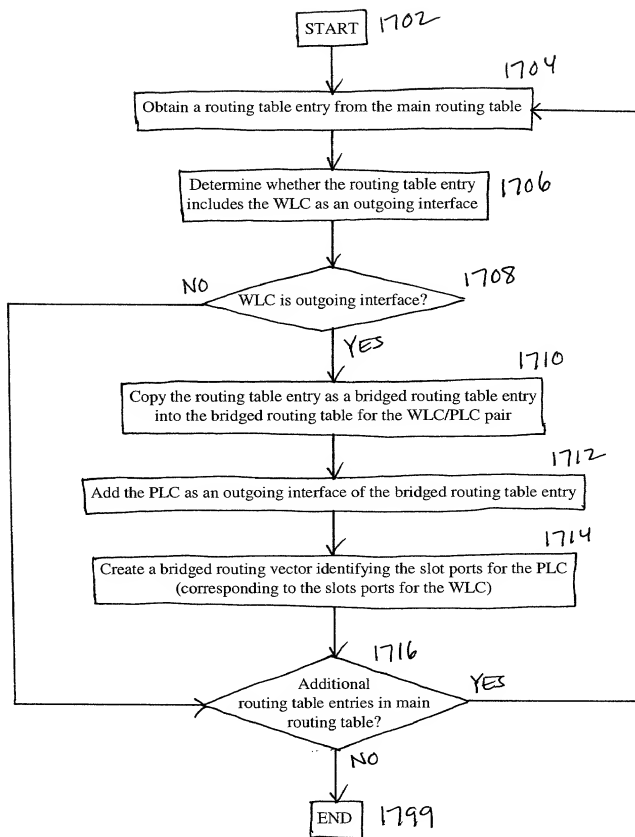


FIG. 17 1700

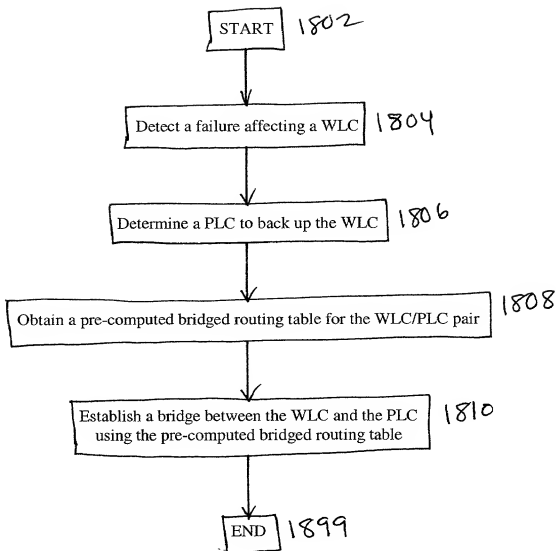


FIG. 18 1800

Docket No.
2204A42

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SYSTEM, DEVICE, AND METHOD FOR BRIDGING NETWORK TRAFFIC

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Bruce D. Sunstein	27,234	Elizabeth P. Morano	42,904
Timothy M. Murphy	33,198	Sonia K. Guterman	44,729
Robert M. Asher	30,445	Keith J. Wood	45,235
Samuel J. Petuchowski	37,910	Karen A. Buchanan	37,790
Harriet M. Strimpel	37,008	Yang Xu	45,243
Steven G. Saunders	36,265		
John J. Stickevers	39,387		
Herbert A. Newborn	42,031		
Jean M. Tibbetts	43,193		
Jeffrey T. Klayman	39,250		
Jay Sandvos	43,900		

Send Correspondence to: Jeffrey T. Klayman
 Bromberg & Sunstein LLP
 125 Summer Street Boston,
 Boston, MA 02110

Direct Telephone Calls to: *(name and telephone number)*
 Jeffrey T. Klayman 617-443-9292

Full name of sole or first inventor	
Yunzhou Li	Date
Sole or first inventor's signature	
Residence	
351 Pawtucket Boulevard, Unit 7, Lowell, MA 01854	
Citizenship	
China	
Post Office Address	
Same as residence	

Full name of second inventor, if any	
Second inventor's signature	
Date	
Residence	
Citizenship	
Post Office Address	